

Material PAHs free (*Polycyclic Aromatic Hydrocarbons. It has recently been found that PAHs can be carcinogenic in case of prolonged skin contact.*)
PAHs testing is compulsory for GS Standard.

Sanitary lever in fiberglass-enriched PA 6, high-elasticity reinforced nylon (PAHs-free). The light weight of this lever allows great precision in its positioning and prevents the accidental closing of the water-flow, that is a common problem of metallic levers.

Professional ceramic-cartridge
Ø35mm. limescale-resistant


Flexible Hose total length: 1500 mm
(effective length when pulled: 1100mm)

Adjustable Spray Jet from concentrated to diffused

© 2001 KLARCO s.r.l.

Flexible water supply hoses
L. 350 mm Ø 1/2" f

Fixing Hole on table top: Ø35 mm.

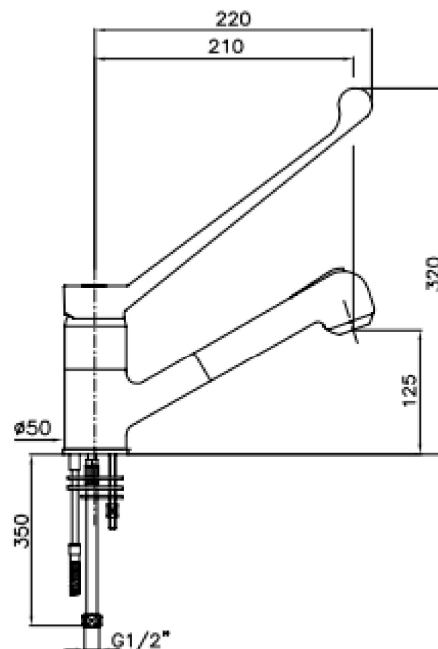

1S.2930.80.82

Mixing Faucet with Pull-out Spray

1S.2930.80.82-E_20151230mf

All contents Copyright (c) 2001-2009 KLARCO s.r.l. - All rights reserved.

All photographs/drawings/information herein contained are the exclusive property of KLARCO s.r.l. and can only be reproduced/published with the express written consent of KLARCO s.r.l. Publication is never allowed for purposes other than commercial promotion and/or technical support of KLARCO products.

KLARCO retains the right to modify without prior notice any information, technical and/or commercial, incl. Art. numbers, drawings, pictures and other technical data contained in this data sheet.