# ICBA, CE 220-240V EURO

Height: 26.8" Width: 10.2" Depth: 22.1" (68.1cm) (25.9cm) (56.1cm)





- Sleek modernized design language, with rounded angles on the corners and trunk
- Digital readout displays in English, Spanish, or French ---for easier programming and control--- and can show either 'Standard' or Metric measurements. Digital readout also shows machine status, and targeted advertising messages can be programmed for display.
- BUNN Infusion Series technology allows for multiple recipes from one footprint --with three brew buttons and two batch sizes
- Energy-saver mode reduces tank temperature during idle periods
- The exclusive Peak Extraction® Sprayhead provides improved uniformity of extraction and greater resistance to limescale buildup
- Electronic funnel lock prevents removal of each brew funnel until drip- through is complete
- USB programming capable
- Brew counter keeps track of how many batches are brewed
- Pre-infusion and pulse brew for maximum flavor extraction. Cold brew lockout & digital temperature control further ensure top-notch brewing.
- Hot water faucet (supplied for custom installation)
- · Servers not included unless otherwise noted

Agency:



#### **Specifications**

Product #: 53100.0502 Interface: Wireless

Finish: Stainless

Funnel: Black Plastic Smart Funnel

Water Access: Plumbed

## **Electrical & Capacity**

Volts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H <sup>2</sup> O Temp.	Phase	# Wires plus Ground	Hertz
220-240	11.0-12.0	2400-2900	Yes	EURO 16A	141	60°F (15.5°C)	1	2	50-60

"When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

### Plumbing Requirements

PSI	kPa	Fitting Supplied	Water Flow Required (GPM)			
20-90	138-621	3/8" Male Flare Fitting	1.00			


#### **CAD Drawings**

Additional Features

2D	Revit	KLC
•		

MARNING:



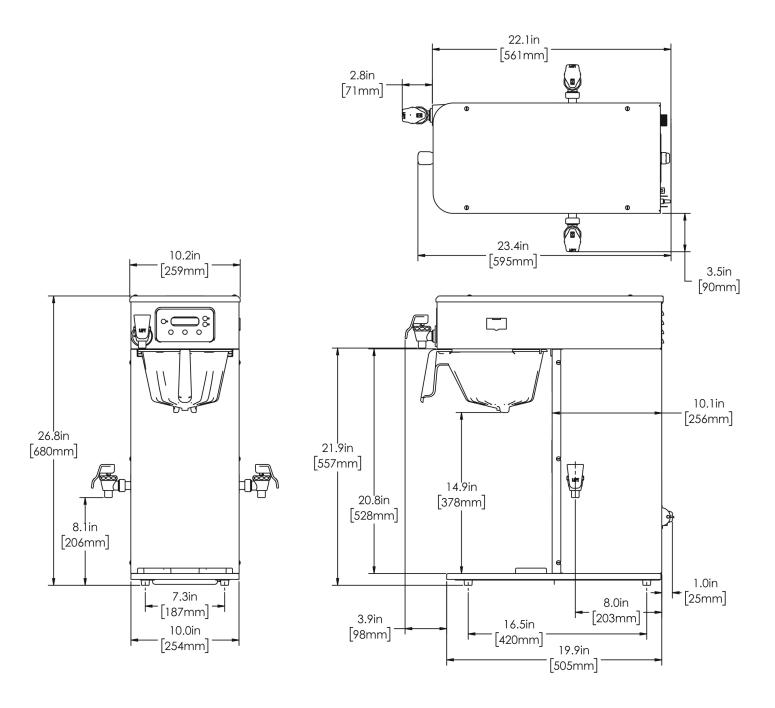

Unit				Shipping				
	Height	Width	Depth	Height	Width	Depth	Weight	Volume
English	26.8 in.	10.2 in.	22.1 in.	34.9 in.	13.3 in.	27.4 in.	46.860 lbs	7.321 ft³
Metric	68.1 cm	25.9 cm	56.1 cm	88.6 cm	33.7 cm	69.5 cm	21.256 kgs	0.207 m³




# Related Products & Accessories: ICBA, CE 220-240V EURO(53100.0502)



























# Serving & Holding Options: ICBA, CE 220-240V EURO(53100.0502)



AIRPOT, 2.5L GL PB 6/ CASE

Product #:13041.0101



AIRPOT, 2.5L SST LA SINGLE PK

Product #:32125.0000



AIRPOT, 2.5L SST LA 6/ CASE

Product #:32125.0100



AIRPOT, 3.0L SST LA SINGLE PK

Product #:32130.0000



AIRPOT, 3.0L SST LA 6/ CASE

Product #:32130.0100



AIRPOT, 3.8L SST LA SINGLE PK

Product #:36725.0000



AIRPOT, 3.8L SST LA 6/ CASE

Product #:36725.0100



STAND ASSY, TF SERVER

Product #:39795.0003



TF SERVER, DSG2 1G SST NOBASE

Product #:42700.0050



TF SERVER, DSG2 1G **BLK NOBASE** 

Product #:42700.0051



TF SERVER, 1G DSG **GEN3 NOBASE** 

Product #:42700.0250



TF SERVER, DSG2 1.5G SST NOBAS

Product #:42750.0050



TF SERVER, 1G/3.8L MECH NOBASE

Product #:44000.0050



TF SERVER, 1G/3.8L MECH BLK NOBASE

Product #:44000.0051



TF SERVER, 1G MECH **GEN3 NOBASE** 

Product #:44000.0250



MECH NOBASE

Product #:44050.0050



TF SERVER, 1.5G/5.7L MECH BLK NOBASE

Product #:44050.0051



STAND ASSY, TF **SERVER** 

Product #:54473.0000



STAND ASSY KIT, TF **SERVER** 

Product #:54473.1000