

INDUCTION - 20kw - On cabinet

CODICE
CR1358229

MODELLO
D74/10GCII

SERIE
DIAMANTE 70

Project:
Rev.:
Zone:
Location:



GENERAL CHARACTERISTICS

In addition to offering the widest choice of solutions and 2 mm thick and 70 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently.
Scotch Brite finish stainless steel outer shells and feet.
Worktop height adjustable from 840 to 900 mm.
Modularity of range: 200-400-600-800-1200
Wide range of accessories.

TECHNICAL SPECIFICATIONS

Unbreakable glass-ceramic top.
Serigraphs identifying cooking zones.
Safety sensor to prevent overheating.
Power adjustable to 12 levels
Heating by means of an inductor equipped with a device that detects the presence of the cooking vessel on the cooking zone and automatically switches the heating on/off, and a device against overheating.

Ensures the correct positioning and suitability of the pot

Power adjustable to 12 levels

Professional components tested to withstand intensive use over time

Safety sensor to prevent overheating.

Cooking zones with 5KW power

Mechanically controlled induction ready for IOT connection to Cloud

Serigraphs identifying cooking zones.

INDUCTION - 20kw - On cabinet

Project:
Rev.:
Zone:
Location:



CODICE
CR1358229

MODELLO
D74/10GCII

SERIE
DIAMANTE 70

Technical Information

SPECIFICATION	DATA
MATERIAL	CR1358229
DEFINITION	D74/10 GCII INDUZIONE M80 A/G
COMMERCIAL LINE	DIAMANTE
SUPPLY	ELECTRICS
DIM. WIDTH	800 mm
DIM. PRODUCTIVITY	730 mm
DIM. HEIGHT	870 mm
NET WEIGHT	65,400 Kg
VOLUME (net)	0.508
PACKAGE LENGTH	840 mm
PACKAGE WIDTH	850,000 mm
PACKAGING HEIGHT	1170,000 mm
PACKAGE VOLUME	0,836 m3
GROSS PACKING WEIGHT	79,000 Kg
STANDARD POWER SUPPLY	380-415V 3
FREQUENCY	50/60 Hz
ELECTRICAL POWER	20 kW
IP GRADE	IPX5

INDUCTION - 20kw - On cabinet


Project:
Rev.:
Zone:
Location:



CODICE CR1358229	MODELLO D74/10GCII	SERIE DIAMANTE 70
---------------------	-----------------------	----------------------

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION - INSTALLATIESCHEMA - IINSTALLATIONSRIJNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm - MESURES EN cm
MEDIDAS EN cm - MATEN IN cm - DIMENSIONES EN cm

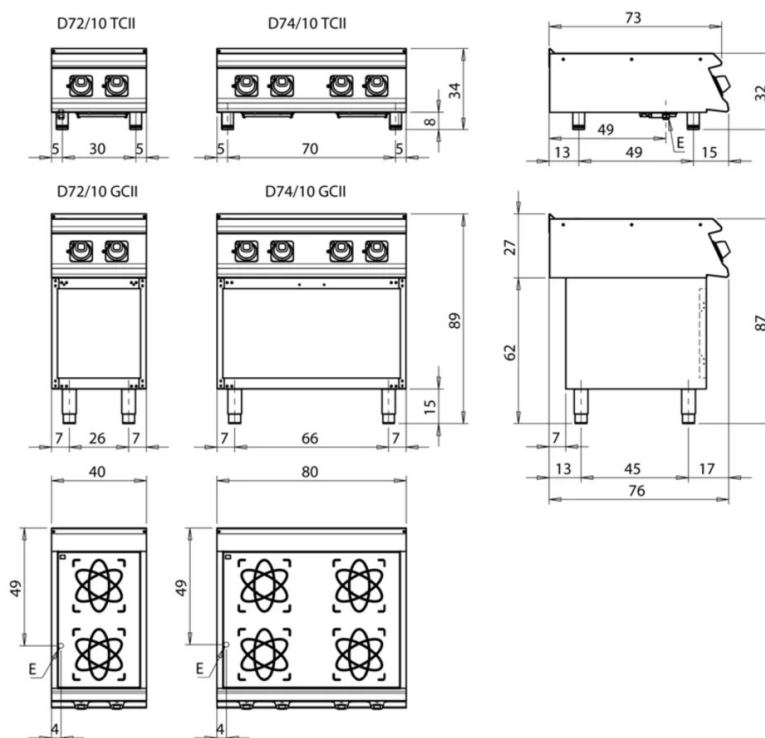

Legenda - Legende - Key - Légende - Leyenda - Legenda - Legenda	
E Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse étoupe de câble él - Pisacable - Elektrische kabelwartel - Entrada cabo eléctrico	G Arrivo gas - Gasanschluss - Gas connection - Arrivée gaz - Union de gas - Gasaansluiting - Ligação gás
S Attacco scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desaguadero - Wateraftapaansluiting - Junção descarga água	H20 Arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de água - Wateraansluiting - Junção alimentação água
S1 Scarico vasca - Wannenabflussrohr - Pan outlet - Vidange du bac - Descarga cuba - Water toevoer - Descarga da cuba	A1 = Calda - Heiss - Warm - Chaude - Caliente - Warm - Morno A2 = Fredda - Kalt - Cold - Froid - Fria - Koude - Frio
S2 Valvola di depressione - Anti-depression valve - Unterdruck ventil - Soupape de dépression - Válvula de depresión - Onderdrukkelep - Válvula de depressão	L Rubinetto di livello - Level tap - Wasserhahn - Robinet de niveau - Grifo de nivel - Niveaakraan - Torneira de nivel
S3 Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket water drain Evacuation eau double envelope - Descarga de água interstícios - Afvoer water tussenruimte - Descarga de água na marmitta com Sistema de aquecimento indirecto	
S4 Scarico - Abflussrohr - Drain - Tuyau d'évacuation - Tubo de drenaje - Aftapbuis - Tubulação de dreno	

INDUCTION - 20kw - On cabinet

CODICE
CR1358229


MODELLO
D74/10GCII

SERIE
DIAMANTE 70

Project:
Rev.:
Zone:
Location:



Product's PLUS



Cooking zones with 5KW power



Mechanically controlled induction
ready for IOT connection to Cloud



Power adjustable to 12 levels



Professional components tested to
withstand intensive use over time



Safety sensor to prevent overheating.