

KERN DE 150K2D

KERN

The long lasting story of success with dust and spray protected display device



Category	
Brand	KERN
Product category	Industrial scale
Product group	Platform scale
Product family	DE

Measuring System	
Construction type of the scale	Multi-division balance
Weighing system	Strain gauge
Weighing capacity [Max]	60 kg; 150 kg
Readability [d]	0,002 kg; 0,005 kg
Resolution	30.000, 30.000
Linearity	± 0,008 kg; 0,02 kg
Reproducibility	0,002 kg; 0,005 kg
Tare range	150 kg
Default unit	kg

	kg
	g
	dwt
	tl (Tw)
	tl (HK)
Units	ozt
	mo
	lb
	oz
	ffa
	tol

Adjustment options	Adjusting with external weight
Recommended adjusting weight	150 kg (F2)
Possible calibration points	50 kg; 100 kg; 150 kg
Stabilization time	2,5 s
Warm-up time	120 min; 120 min
Eccentric loading at 1/3 [Max]	0,01 kg; 0,025 kg

Maximum creep (15 minutes)	20 g
Maximum creep (30 minutes)	40 g

Approval	
CE mark	✓

Display	
Display type	LCD
Display screen size	87×29 mm
Display backlight	✓
Display digit height - smallest digit	25 mm
Display digit height	25 mm

Construction	
Dimension display device (W×D×H)	225×110×55 mm
Dimensions weighing platform (W×D×H)	318×308×88 mm
Material display housing	Plastics
Material weighing plate	stainless steel
Material platform	metal, lacquered
Dimensions weighing surface (W×D)	315×305 mm
Display device cable length	1,6 m
Allowed cable length display device [Max]	3 m
Load cells - number	1

Functions	
Number of keys for operation	5
Auto-off interval(s) in battery mode/rechargeable battery mode	3 min off
Tare function	manual (multi)
Percentage determination	✓
Counting function	✓
Function for averaging under unstable weighing conditions	✓
Recipe/summing level	Sum A
Underfloor weighing	None
Interfaces	RS-232 standard
IP protection - display	IP65

Counting	
Smallest piece weight when piece counting - laboratory conditions	4 g
Smallest piece weight when piece counting - normal conditions	40 g
Reference quantity	5, 10, 20, 25, 50

KERN DE 150K2D



The long lasting story of success with dust and spray protected display device

Counting resolution (laboratory conditions) 37.500

Article number for DAkkS calibration 963-129

Article number for certificate of conformity (verification) 969-517

Power Supply

Input voltage power supply / power [Max] 220 V - 240 V AC, 50 Hz

Input voltage device / power [Max] 15 V, 500 mA

Plug-in power supply type Power adapter

Supplied power supply Power supply unit

Plug-in power supply / adapter for countries - included with the delivery EURO
UK
US
CH

Plug-in power supply / adapter for countries - optional EURO
UK
US
CH

Rechargeable battery optional Rchrg. battery optional

Rechargeable battery charging time 10 h

Rechargeable battery operating time - backlight on 15 h

Rechargeable battery operating time - backlight off 30 h

Battery 9 V block

Battery / accumulator type NiMH

Battery connection Plug-in terminals

Battery operating time 12 h

Environmental conditions

Humidity of environment [Max] 80 %

Ambient temperature [Min] 5 °C

Ambient temperature [Max] 35 °C

Storage temperature [Min] -20 °C

Storage temperature [Max] 60 °C

Packing & Shipping

Readability force [d] (N) 1 d

Dimensions packaging (W×D×H) 530×420×170 mm

Net weight 6,728 kg

Shipping method Parcel service

Net weight approx. 7 kg

Gross weight approx. 8 kg


Shipping weight 7,66 kg

Services (optional)

Article number for adjustment at the location of installation 961-249

Pictograms

STANDARD

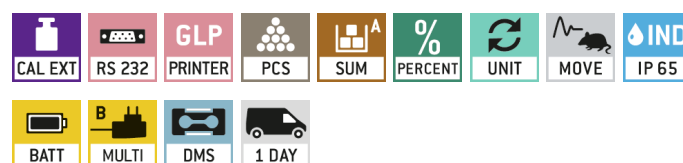

OPTION

