


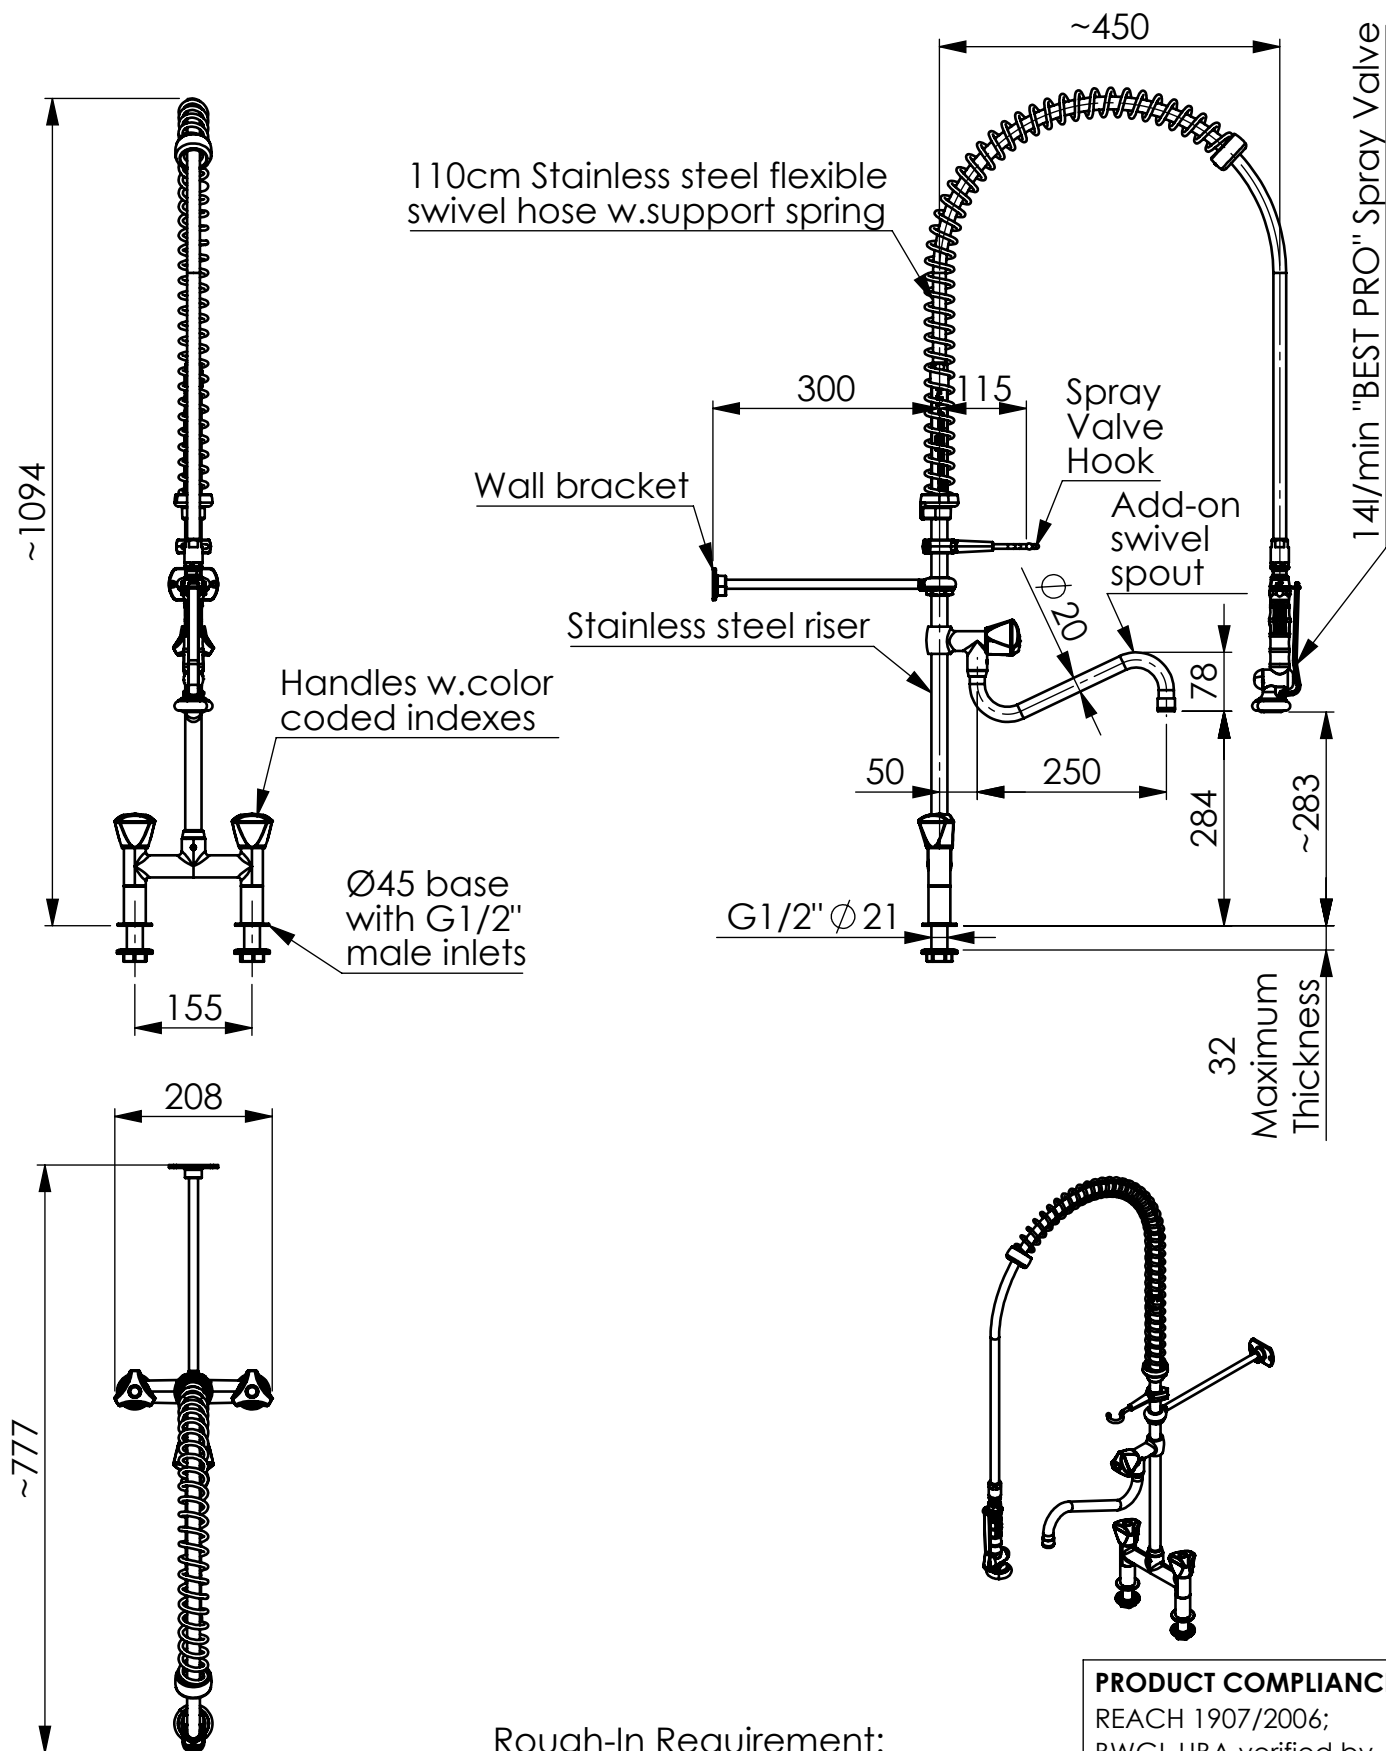

Rough-In Requirement:
24mm Mounting Hole

PRODUCT COMPLIANCE:

REACH 1907/2006;
BWGL UBA verified by
DVGW CERT third-party

TITLE / DESCRIZIONE

Deck-mount Pre-Rinse Unit. Chrome-plated brass double-hole (155mm center distance) with riser add-on faucet with 250mm swivel nozzle (Ø20mm) and G1/2" compression headwork; 50mm-long risers; G1/2"x50mm mounting shanks with check-valves; G1/2" compression headworks; stainless steel riser tube; 300mm-long wall bracket; 14l/min KLARCO "BEST PRO" spray valve.

This drawing contains proprietary information which is the property of KLARCO S.R.L. without whose written permission it may not be copied, shown or handed to a third party or otherwise used

Questo disegno contiene informazioni di proprietà di KLARCO S.R.L. e senza la sua autorizzazione scritta non può essere copiato, mostrato o ceduto a terzi o in qualsiasi altro modo usato

DRN / DIS

A.E.

CHD / VER

APPR

SCALE /
SCALA

1:10

DATE /
DATA

04/05/2023

SHEET / PAG
1 of 2


NUMBER / CODICE DIS.

MODEL / PRODOTTO

3S.3103.19N.S3/121

A4V

ITEM NO.	SALES NO.	DESCRIPTION
1	P005	GRAY OVERHEAD SPRING
2	P664	L.110cm F1/2"xF1/2" FLEXIBLE HOSE
3	P090	SPRING SUPPORT
4	P121	300mm CHROME WALL BRACKET
5	P266/S3	630mm G1/2" RISER W.ADD ON TAP AND O-RING
6	P076	O-RING 2062 (Ø15.6x1.78), EPDM 70 PEROX
7	H033	3Pe HANDLE W.COLOR INDEX (specify the color)
8	VS3/B	COMPLETE HANDLE WITH BLUE CODED INDEX + HEADWORK KIT
9	VS0	G1/2" COMPRESSION HEADWORK
10	P074	FLAT GASKET 1/2" Ø18,5x11 sp.2mm
11	P030	CHECK VALVE DW15/DN10
12	P236	SPOUT SCREW (short)
13	COS1	SWING NOZZLE Ø20x250x70
14	P015	STREAM REGULATOR (Ø20 SPOUT)
15	P197	O-RING 14.00x2.00mm EP70P.A (4270) PEROX
16	P612	#2 OR KIT FOR FAUCET (STYL RST)
17	VS3/R	COMPLETE HANDLE WITH RED CODED INDEX + HEADWORK KIT
18	P499/N	BLACK SPRAY VALVE "BEST PRO"
19	P610	FLAT GASKET 1/2" Ø18,5x11 sp.3mm
20	P260	GRAY SPRAY VALVE HOOK

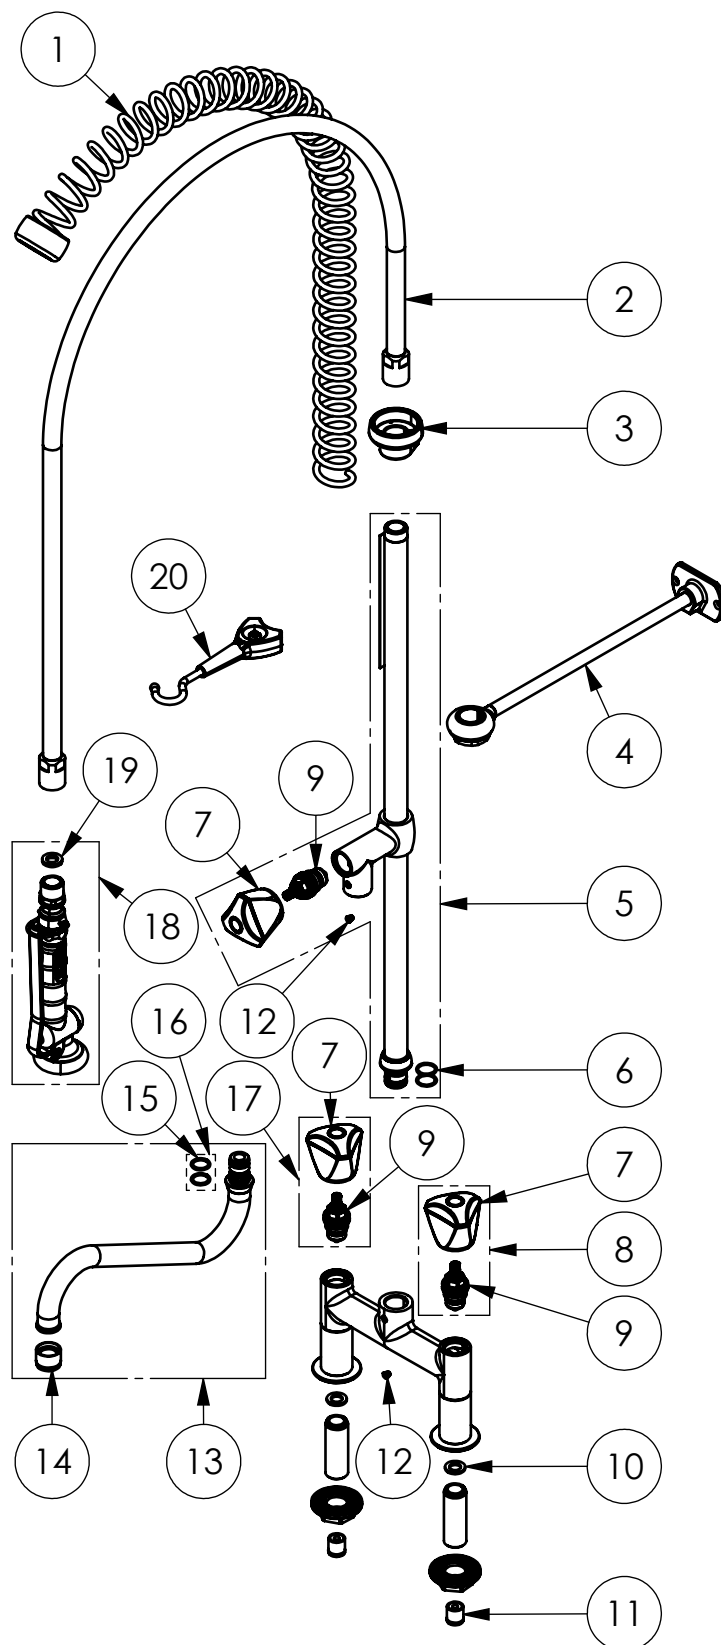

PRODUCT COMPLIANCE:

REACH 1907/2006;
BWGL UBA verified by
DVGW CERT third-party

TITLE / DESCRIZIONE

Deck-mount Pre-Rinse Unit. Chrome-plated brass double-hole (155mm center distance) with riser add-on faucet with 250mm swivel nozzle (Ø20mm) and G1/2" compression headwork; 50mm-long risers; G1/2"x50mm mounting shanks with check-valves; G1/2" compression headworks; stainless steel riser tube; 300mm-long wall bracket; 14l/min KLARCO "BEST PRO" spray valve.

This drawing contains proprietary information which is the property of KLARCO S.R.L. without whose written permission it may not be copied, shown or handed to a third party or otherwise used

Questo disegno contiene informazioni di proprietà di KLARCO S.R.L. e senza la sua autorizzazione scritta non può essere copiato, mostrato o ceduto a terzi o in qualsiasi altro modo usato

DRN / DIS

A.E.

CHD / VER

APPR

SCALE /

SCALA

DATE /

DATA

SHEET / PAG

2 of 2

NUMBER / CODICE DIS.

MODEL / PRODOTTO

3S.3103.19N.S3/121

A4V