

## MP 450 Ultra



EasyPlug




D

Pan capacity

up to 100 litres



Specially designed for intensive use in commercial/institutional catering

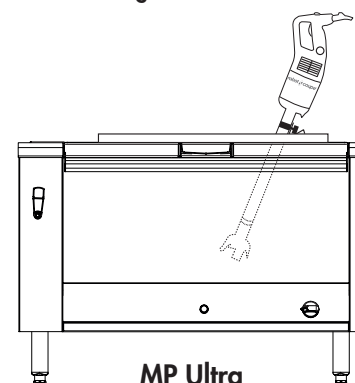

MP Ultra

A

## SALES DESCRIPTION

Ideal for blending soups and puréeing fruit and vegetables. Special institutional catering model intended for intensive use

B

## TECHNICAL DESCRIPTION

MP 450 Ultra immersion blender. Single phase. Power: 500 W. Speed: 9,500 rpm. 100% stainless-steel blades, bell and tube (total length: 450 mm). "EasyPlug" system featuring detachable power cord

C

## TECHNICAL DATA

<b>Output power</b>	500 W	
<b>Electrical datas</b>	Single phase - Plug supplied	
<b>Speed</b>	9,500 rpm	
<b>Rate of recyclability</b>	95%	
<b>Net weight</b>	4.9 kg	
<b>Supply</b>	<b>Amperage</b>	<b>Reference</b>
220-240/50-60/1	2.3 Amp	34810L
240V/50-60/1	2.3 Amp	34811L
120V/60/1	4.5 Amp	34815L
220V/60/1 SAU*	2.3 Amp	34818L

\*For commercial use only

## STANDARDS

EN 12100-1 & 2-2004, EN 60204-1-2006, EN 12853, EN 60529-2000 : IP55 & IP34



E

## CHARACTERISTICS AND BENEFITS

## MOTOR UNIT

- Power 500 W
- Stainless-steel motor unit with air vents in the top section only to ensure watertightness
- Lug on motor housing serves as a rest and pivot on the pan rim for greater user comfort
- Speed 9,500 rpm
- Self-regulating speed system
- New patented "EasyPlug" system making it easier to replace the power cord during after-sales servicing
- Cord winding system for tidy storage and optimum lifespan

## TUBE AND BELL

- 100% stainless-steel blades, bell and tube (total length: 450 mm).
- Foot with detachable bell and blades (patented system exclusive to Robot-Coupe)
- Watertight bell design for optimum lifespan

## STANDARD ATTACHMENTS

- Wall-mounted immersion blender holder
- Tool for fixing and detaching the blades

## MP 450 Ultra

F

## OPTIONAL ATTACHMENTS

- 3 adjustable stainless-steel pan supports:
  - Ref. 27363 – for pans with a diameter of 330 650 mm
  - Ref. 27364 – for pans with a diameter of 500 1000 mm
  - Ref. 27365 – for pans with a diameter of 850 1300 mm
- 1 universal pan support:
  - Ref. 27358 – screws onto pan rim



G

## DRAWINGS &amp; DIMENSIONS

Power cord and plug supplied

