

# Specification/Data sheet


## UltraVent XS 6 2/3 E



Item number: 60.7X.XX

### Variants

- 60.74.159: UltraVent XS 6 2/3 E
- 60.73.945: Combi-Duo adapter kit UltraVent XS 6 2/3 E
- 60.74.254: UltraVent XS 6 2/3 E + Combi-Duo adapter kit UltraVent XS 6 2/3 E

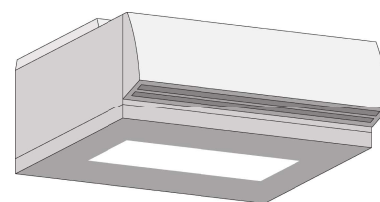

### Description

- The condensation technology in the UltraVent captures and dissipates steam in the form of condensate. There is no need for complicated and expensive installations to remove exhaust air. Installation is simple and it can be retrofitted at any time. There is no need for a connection to the outside.

### Technical Information

- Ratings: 125V 1 NAC 60 HZ
- Connected load: 215 W
- Extraction power: 9,900 - 20,000 ft³/h
- Operating noise level: 70 dBA
- Width: 25 7/8" (657 mm)
- Height: 9 1/2" (240mm)
- Depth: 22 3/4" (580 mm)
- Weight: 66 lbs (30kg)
- Certifications: VDE, NSF, UL

### Equipment

- High extraction power
- Proximity door contact switch
- Automatic increase of extraction power when cooking chamber door is opened
- Waste water discharge through the unit, no additional discharge required

### Material

- Stainless steel

### Note

- The local standards and regulations for ventilation systems must be adhered to.
- The UltraVent XS condensation hood can be used for right and left hand door units. Supplied with installation options for both variants.
- The XS 6 2/3 has been tested in accordance with EPA test method 202. The total amount of grease-laden effluents collected was 0.21 mg/m³ for bone-in, skin-on roasting chickens weighing 2-1/2 to 3-1/2 lbs quartered. The results are considered to comply with UL710B, Section 59, formerly Section 14 of UL 197, Eight Edition, Supplement SB, and NFPA96, paragraph 4.1.1.2. Request full UL Report Letter- Reference: UL Project : 4787499569.