


ACCESSORIES FOR STAINLESS STEEL TABLE

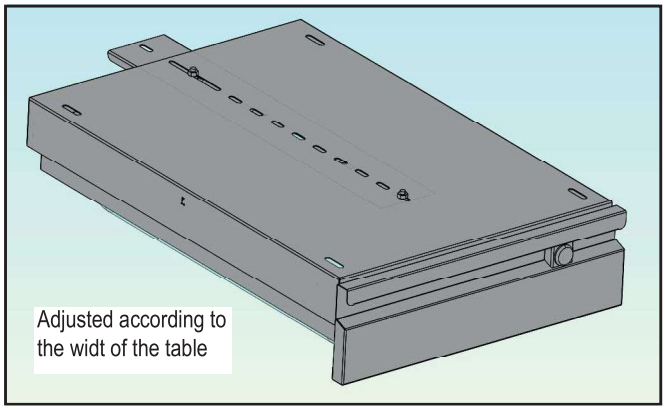


Designation	Ref.
Drawer with front panel + GN1/1 polypropylene container for tables 700mm wide (not adjustable)	809 561
Drawer with front panel + GN1/1 polypropylene container (wide adjustable)	809 564
Drawer with front + GN1/1 polypropylene container (wide adjustable) + lock and key	819 564
Drawer with front panel + GN1/1 copolyester container for tables 700 mm wide (non adjustable)	849 561
Drawer with front panel + GN1/1 copolyester container (wide adjustable)	849 564
Drawer with front panel + GN1/1 stainless steel container for tables 700mm wide (non adjustable)	829 561
Drawer with front panel + GN1/1 container stainless steel (wide adjustable)	829 564


- Made of food quality stainless steel with chromium content greater than 17.5.
- Sliding with ball-bearings.
- Can be fixed in any position on the slats in the frame profiles.
- With removable GN 1/1 container, deep 100 mm.

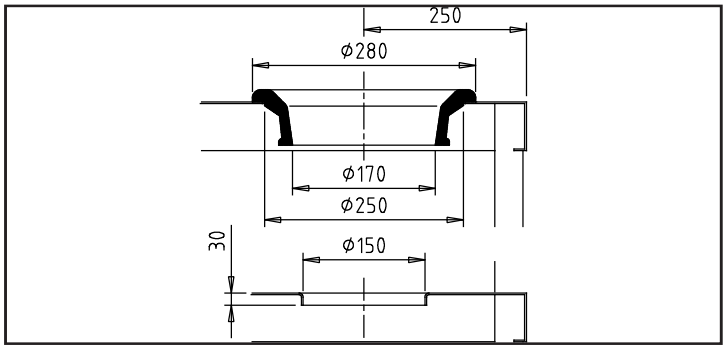

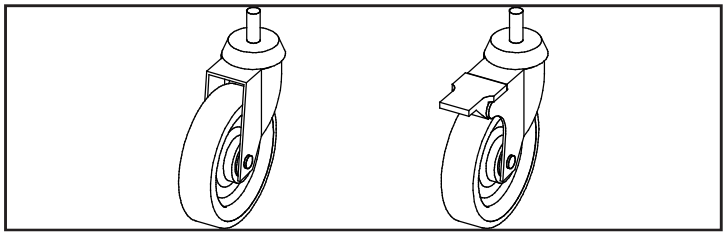

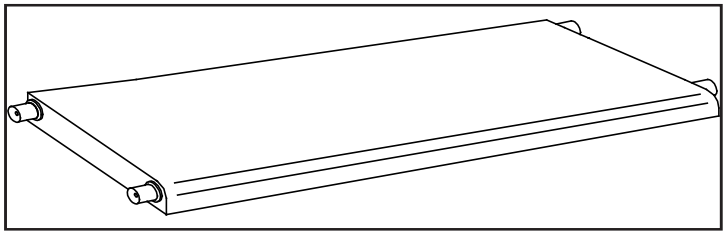

- Made of food quality stainless steel with chromium content greater than 17.5%.
- Thickness 12/10th mm.
- 4 welded corners.
- Fixed by screw crimped into each leg.

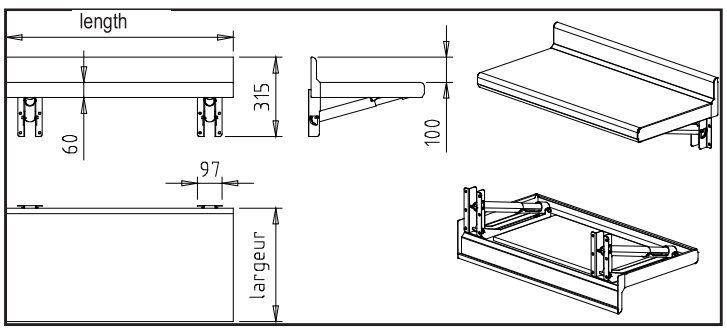

WASTE HOLE :

- Waste hole + rubber flange.
- Optional stainless steel lid, reference 230158.



- Waste hole Ø150 mm.

WHEELS :

- 4 swivelling wheels Ø125 mm, 2 with brake.
- Non-marking tyre.
- Polyamide cover (stainless steel cover on request).

SHELVES :

W x L	Ref.	W x L	Ref.	W x L	Ref.
700 x 700	408 970	600 x 600	408 950		
700 x 1000	408 971	600 x 1000	408 951	800 x 1000	408 981
700 x 1200	408 972	600 x 1200	408 952	800 x 1200	408 982
700 x 1400	408 973	600 x 1400	408 953	800 x 1400	408 983
700 x 1500	408 974	600 x 1500	408 954	800 x 1500	408 984
700 x 1600	408 975	600 x 1600	408 955	800 x 1600	408 985
700 x 1800	408 976	600 x 1800	408 956	800 x 1800	408 986
700 x 2000	408 977	600 x 2000	408 957	800 x 2000	408 987
700 x 2200	408 979	600 x 2200	408 958	800 x 2200	408 988
700 x 2400	408 980	600 x 2400	408 959	800 x 2400	408 989

TAILOR MADE FOLDING HANGING WORKTOP :


- Made of food quality stainless steel with chromium content greater than 17.5%.
- Thickness 15/10th mm.
- Wall fixation on 2 articuled supports allowing to fold the worktop.
- When ordering, please confirm dimensions, maximum length 1400mm and depth from 450 to 700mm.


Non-contractual documents. The specifications given are subject to change with a view to improvement.


Tournus Equipement - 25 avenue Jean Moulin - CS 20005 - 71700 Tournus
+33 (0)3 85 27 42 65 - export@tournus.com - www.tournus.com

ACCESSORIES FOR STAINLESS STEEL TABLE



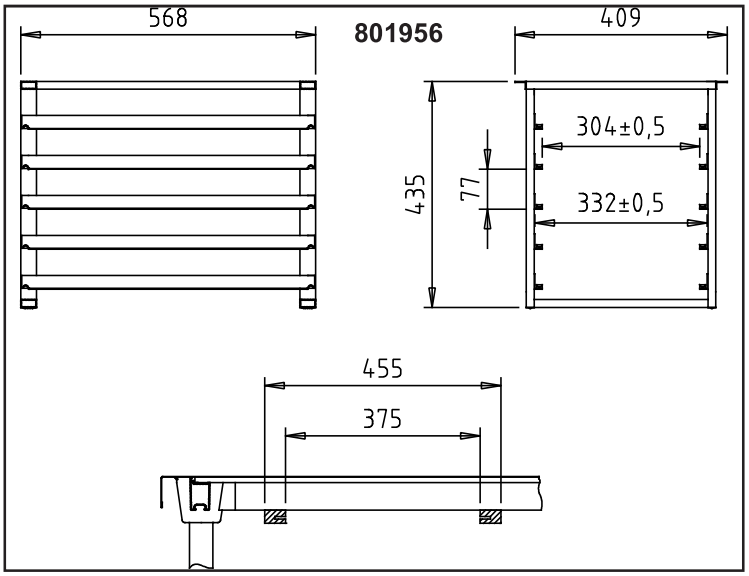

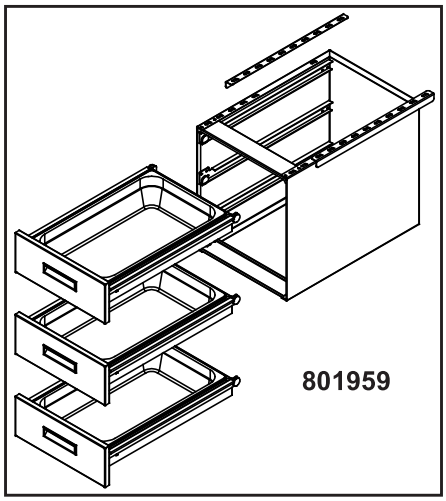

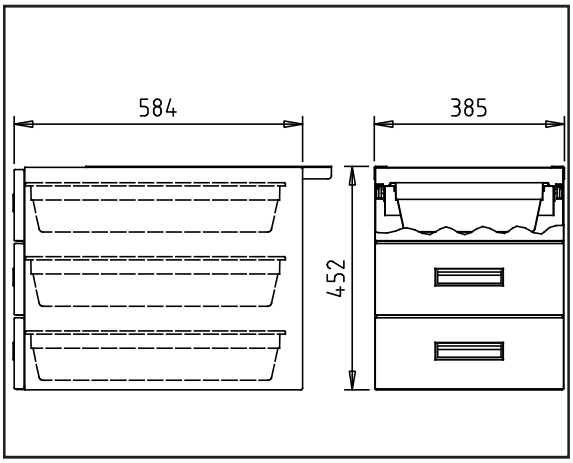


SLIDE FRAME CODE 801956

- Made of food quality stainless steel with chromium content greater than 17.5%.
- Frame made of 30 x 15 mm tubes and slide bars 20/10th mm thick.


3-DRAWER UNIT CODE 801959

- Made of food quality stainless steel with chromium content greater than 17.5%.
- Box thickness 15/10th mm.
- 3 x GN1/1 stainless steel containers on slide bars with stainless steel roller.







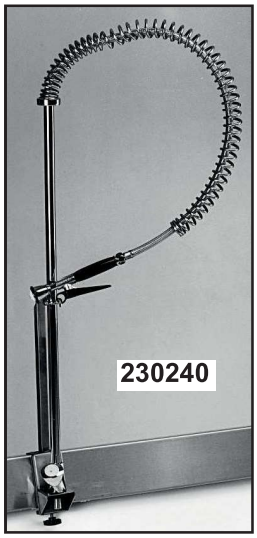





TAPS :

Reference 230300 (drilling Ø29 mm):
- Single-hole mixer tap fixed by threaded rod Ø3/4", 50 mm long. Disposal Ø20 mm, 250 mm long made of chromium-plated brass, 360° swivel with anti-limescale jet regulator. Supply by 2 braided stainless steel pipes 340 mm long with 1/2" rotary nuts. Flow rate 26 l/min.

Reference 806730 (drilling Ø22 mm):
- Single-hole mixer tap fixed by threaded rod Ø3/4", 50 mm long. Disposal Ø22 mm, 300 mm long made of chromium-plated brass, with brass star jet regulator. Supply by 2 braided stainless steel pipes 360 mm long with 3/8" rotary nuts. Flow rate 45 l/min.

Reference 230507 (drilling Ø35 mm):
- Electronic tap with 6 V lithium battery and anti-limestone aerator. Supply by 2 braided stainless steel pipes 350 mm long with 3/8" rotary nuts. Flow rate 3 l/min.

Reference 230240 (drilling Ø23 mm):
- Simple single-hole tap fixed by threaded rod Ø1/2", 50 mm long. Flow rate 16 l/min.

Reference 230241 (drilling Ø29 mm):
- Single-hole mixer tap fixed by threaded rod Ø3/4", 50 mm long. Supply by 2 braided stainless steel pipes 300 mm long with 1/2" rotary nuts. Flow rate 16 l/min.

Reference 230245 (drilling Ø29 mm):
- Single-hole mixer tap fixed by threaded rod Ø3/4", 50 mm long. Supply by 2 braided stainless steel pipes 300 mm long with 1/2" rotary nuts. Flow rate 16 l/min.

Non-contractual documents. The specifications given are subject to change with a view to improvement.

Tournus Equipement - 25 avenue Jean Moulin - CS 20005 - 71700 Tournus
+33 (0)3 85 27 42 65 - export@tournus.com - www.tournus.com