

**LA FELSINEA S.R.L.**




Via L. Einaudi, 47

35016 Piazzola Sul Brenta (PD) - ITALY

Tel. +39 049 9601602 r.a. - Fax +39 049 9601606

E-mail: info@felsinea.comWebsite: <http://www.felsinea.com>**Zaffira LX 300-330-350**

- Rounded design, no sharp edges and visible screws.
- Chrome plated and ground slide rod.
- Lapped cast iron slide rod bushing.
- Vulcanized rubber stops on carriage.
- Removable support cover for thickness gauge plate.
- Stainless steel slice deflector with bayonet fitting.
- Stainless steel screws and fittings.
- Enclosed and sealed belt pulley.
- 49,5 mm distance between blade and motor.
- Bottom cover.
- Changeover electronic circuit 110-220-380 V single and three phase.
- Built in sharpening tool with bottom protection.
- Standard blade removal tool.
- Aluminium knob.
- Aluminium telescopic feet with rubber base.
- Stainless steel pushbuttons with IP67 protection rating.
- Maintenance tool kit.
- Available optional accessories: side guard for food tray.

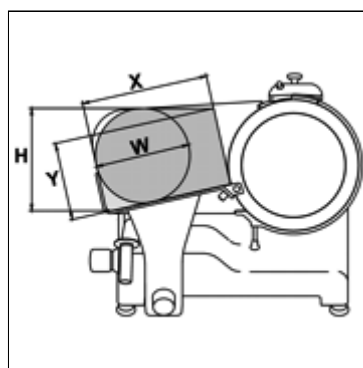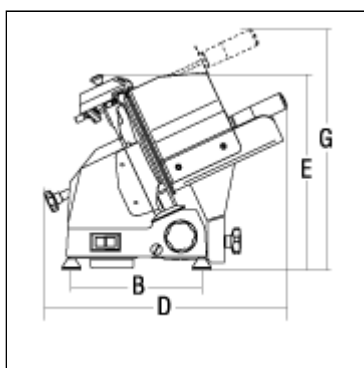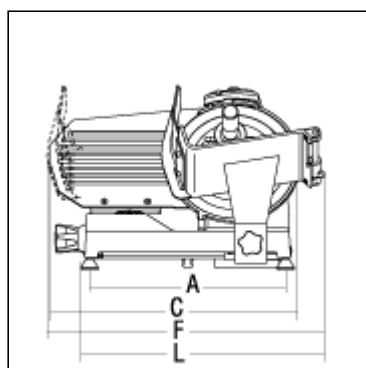

Model	ZAFFIRA LX 300	ZAFFIRA LX 330	ZAFFIRA LX 350
Power source	230V 50Hz F+N 400V 50/60 Hz 3F	230V 50Hz F+N 400V 50/60 Hz 3F	230V 50Hz F+N 400V 50/60 Hz 3F
Motor	Watt 275 - HP 0,37	Watt 275 - HP 0,37	Watt 370 - HP 0,50
Blade	Ø 300 mm / 12"	Ø 330 mm / 13"	Ø 350 mm / 14"
Cut thickness	mm 23	mm 23	mm 23
Run of carriage	mm 310	mm 310	mm 310
A	465 mm	465 mm	465 mm

B	340 mm	340 mm	340 mm
C	615 mm	645 mm	660 mm
D	547 mm	570 mm	575 mm
E	465 mm	455 mm	455 mm
F	710 mm	710 mm	710 mm
G	545 mm	535 mm	530 mm
L	600 mm	586 mm	580 mm
X	270 mm	270 mm	270 mm
Y	190 mm	210 mm	225 mm
H	240 mm	260 mm	275 mm
W	220 mm	240 mm	250 mm
Blade inclination	35°	35°	35°
Net weight	35 Kg	36 Kg	37 Kg
Shipping	760x640x700 mm	760x640x700 mm	760x640x700 mm
Gross weight	44 Kg	45 Kg	46 Kg