

Zaffira LX 300-330-350 AUT




- Rounded design and no sharp edges and visible screws.
 - Chrome plated and ground slide rod.
 - Self lubricating slide rod bushings.
 - Vulcanized rubber stops on carriage.
 - Removable support cover for thickness gauge plate.
 - Stainless steel slice deflector with bayonet fitting.
 - Stainless steel screws and fittings.
 - Enclosed and sealed belt pulley.
 - Bottom cover.
 - Changeover electronic circuit 110-220-380 V single and three phase.
 - Built in sharpening tool with bottom protection.
 - Standard blade removal tool.
 - Aluminium knob.
 - Aluminium telescopic feet with rubber base.
 - Stainless steel pushbuttons with IP67 protection rating.
 - Maintenance tool kit.
 - 49,5 mm distance between blade and motor.
 - 35° blade inclination.
 - Ergomic controls - push buttons with IP67 protection rating.
 - 3 speed selection.
 - 3 different adjustments for carriage travel.
 - Slice counter.
 - Slice number setting with automatic stop feature.
 - Enclosed and sealed drive motor.
 - Positive drive belt.
 - Carriage release system for manual slicing.
 - Output slices per minute: 37 - 70.
- Options:
- Side guard for food tray.
 - Lifting lever
 - ZS hopper with a special end weight and an adjustable vertical product fence to provide stability and advance products evenly






Ergonomic controls



ZS hopper optional



Lifting lever optional

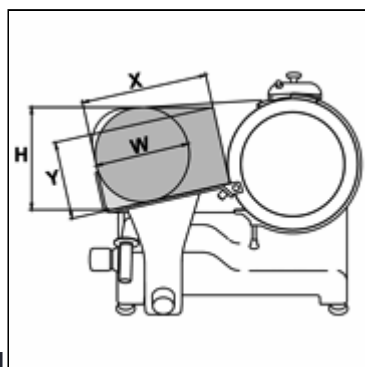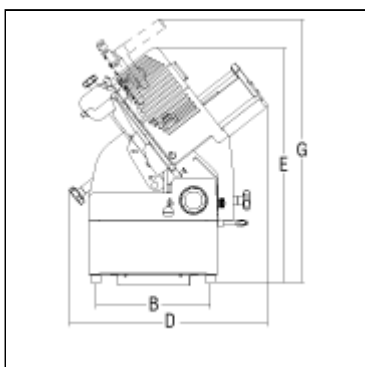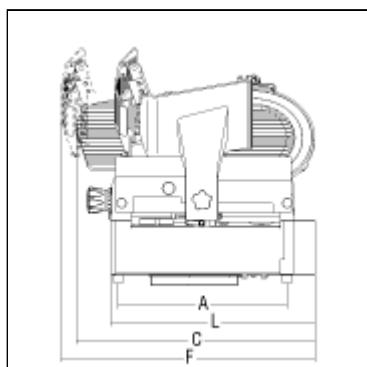



Model	ZAFFIRA LX 300 AUT	ZAFFIRA LX 330 AUT	ZAFFIRA LX 350 AUT
Power source	230V 50Hz F+N	230V 50Hz F+N	230V 50Hz F+N
Motor	Watt 275+200 HP 0,37+0,27	Watt 275+200 HP 0,37+0,27	Watt 370+200 HP 0,50+0,27
Blade	Ø 300 mm / 12"	Ø 330 mm / 13"	Ø 350 mm / 14"
Cut thickness	mm 23	mm 23	mm 23
Run of carriage	mm 310	mm 310	mm 310
A	465 mm	465 mm	465 mm
B	340 mm	340 mm	340 mm
C	622 mm	649 mm	659 mm
D	620 mm	611 mm	610 mm
E	513 mm	515 mm	515 mm
F	647 mm	665 mm	675 mm
G	528 mm	530 mm	530 mm
L	558 mm	563 mm	573 mm
X	270 mm	270 mm	270 mm
Y	190 mm	210 mm	225 mm
H	240 mm	260 mm	275 mm
W	220 mm	240 mm	250 mm
Blade inclination	35°	35°	35°
Net weight	38 Kg	39 Kg	40 Kg
Shipping	870x840x750 mm	870x840x750 mm	870x840x750 mm
Gross weight	53 Kg	54 Kg	55 Kg