



BOX


80
lt/h60
lt/hstainless
STEELICE
BANKGAS
R290

	BOX 60	BOX 80
Cooling capacity (l/h)	60	80
Max continuous supply (l)	18	45
Cold water temperature*	5 - 12 °C	
Cooling technology	Ice bank - single stainless steel coil	
Ice bank capacity (l)	7	14
Ice bank (kg)	3	5
Condensation	Forced ventilation	
Refrigerant gas	R290	
Adjustable thermostat	Yes	
Supply	230 V - 50 Hz	
Compressor power	1/8 HP	1/5 HP
Absorbed power	275 W - 1,2 A	400 W - 1,75 A
Working room temperature	Min 5°C - Max 35°C	
Inlet water pipe	Ø5/16" (8 mm)	
Inlet CO ₂ pipe	Ø5/16" (8 mm)	
Typology	Undercounter	
Net weight (kg)	19	23
Gross weight (kg)	21	26
Dimensions W x D x H (mm)	318 x 335 x 467	320 x 456 x 467
Packaging dimensions (mm)	360 x 360 x 650	400 x 570 x 650
Dispensing options	Cold still water and room temperature water	
Materials	Robust stainless steel	

OPTIONAL

Water pressure reducer	
Filters	Activated carbon filter + UVC
Filtration	UF or reverse osmosis.
Anti-flooding device	Water Block
Taps	Mechanical or electronic

* rated at a room temp. of 25 °C and inlet water temp. of 20 °C
For a proper installation of the system, the use of the WATER BLOCK is compulsory.

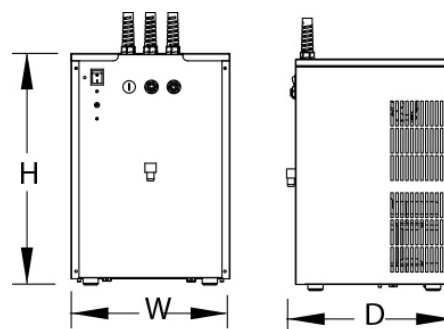

CERTIFICATIONS

