




VA 4000



Fully-Automatic Food Slicer

- ▶ 99 easily programmable slicing programmes (PLU). User-friendly, self-explanatory symbolic keyboard.
- ▶ Graphical representation of the slicing programme.
- ▶ Operator is led through the programme on the display.
- ▶ Up to 4 stacks or up to 9 shingled portions side by side and up to 9 layers on top of the other.

VA 4000

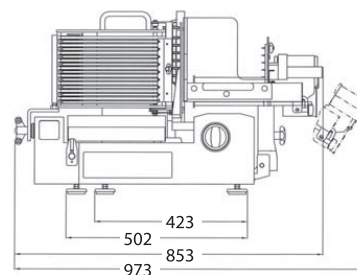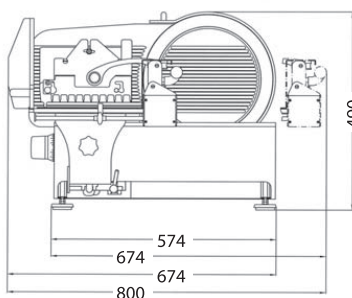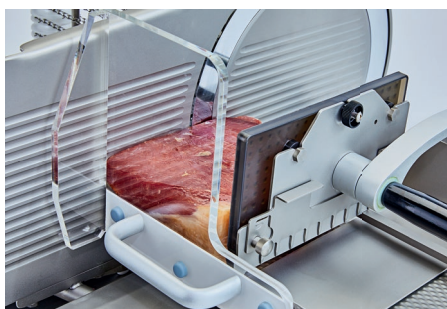

Technical Data

Counter Space required	(L x W): 574 x 502 mm
Overall Dimensions	(L x W x H): 620 x 853 x 660 mm
Carriage	(L x W): 275 x 360 mm
Weight	ca. 80 kg
Voltage	3-phase or 1-phase, voltage and cycles as required
Power Requirement	0,6 kW
Sound Level	<70 dB (A)
Blade	330 mm 6, hollow-ground, hard chromed, stay sharp quality
Slice Thickness	0 — 10 mm (infinitely variable)
Cutting Length	255 mm
Cutting Height	195 mm
Capacity Speed of Carriage	infinitely variable, about 25 - 55 strokes per minute
Precise Slicing	Because of separate gear motor for blade rotation. Therefore 98% power transmission by direct gear drive.
Cutting Heights	Easy calling up by entering the PLU-number with max. 3 digits between 001 and 999. With every PLU-number there are programmed all necessary slicing data, such as name of article, speed of the carriage, slice thickness and all parameter for stacking, shingling down, shingling cross or circle shingling.

Stacking



1 - 4 stacks per slicing procedure adjustable, maximum cutting height 80 mm

Shingling down



Shingling distance down up to 30 mm (infinitely variable), per slicing procedure **1 - 2 shingled portions** side by side und up to 9 layers on top of the other

Shingling cross



Shingling distance down and cross up to 30 mm (infinitely variable), per slicing procedure **1 - 9 shingled portions** side by side und up to 9 layers on top of the other

Circle shingling



Circle shingling with a diameter of up to 230 mm and up to 9 layers on top of the other

Security and Hygiene

Model VA 4000 corresponds to legal security and hygienic requirements. Sharpening device is removable. Carriage can be tilted aside for cleaning. Chain frame, stacking device and receiving plate are removable. Machine body and all metal parts in contact with food are **made of stainless steel**.

Special Executions

VA 4000 Teflon

Tefloned execution, ideal for slicing cheese. Carriage, thickness plate, blade guard and blade are tefloned. Easy and precise slicing, no smearling and no sticking. Further advantage: quick and easy to clean with dry cloth.

All other technical details as VA 4000.

With large Carriage

ideal for large food products. All other technical details as above. Special executions upon request.

Overall Dimensions (L x W): 275 x 530 mm.

With Clawend Pieceholder

instead of standard end piece holder

With Table for Slicer

Made of stainless steel

Overall Dimensions (L x W x H): 735 x 645 x 670 mm.

Conveyor Belt

See leaflet model VA 4000 AT.

VA 4000 P

Special execution model VA 4000 P prepared for connection to **automatic wrapping machine** and/or **interleaver**. With receiving fork for transportation of the sliced portion to the wrapping machine, with or without tray.