




Zaffira LX 300-330-350 AUT



- Rounded design, no sharp edges and visible screws.
- Chrome plated and ground slide rod.
- Lapped cast iron slide rod bushing.
- Vulcanized rubber stops on carriage.
- Removable support cover for thickness gauge plate.
- Stainless steel slice deflector with bayonet fitting.
- Stainless steel screws and fittings.
- Enclosed and sealed belt pulley.
- 49,5 mm distance between blade and motor.
- Bottom cover.
- Changeover electronic circuit 110-220-380 V single and three phase.
- Built in sharpening tool with bottom protection.
- Standard blade removal tool.
- Ergomic controls – push buttons with IP67 protection rating.
- 3 speed selection
- 3 different adjustments for carriage travel.
- Slice counter.
- Slice number settino with automatic stop feature.
- Enclosed and sealed drive motor.
- Positive drive belt.
- Carriage release system for manual slicing.
- Available optional accessories: side guard for food tray.

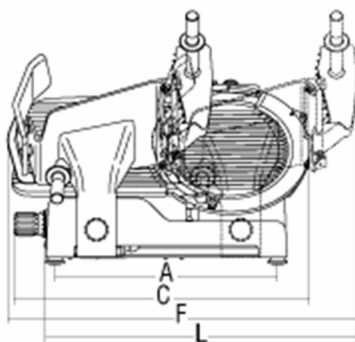

KONGELIG HOFLEVERANDØR

OLUF BRØNNUM & CO A/s

GRUNDLAGT 1874

Model	ZAFFIRA LX 300 AUT	ZAFFIRA LX 330 AUT	ZAFFIRA LX 350 AUT
Power source	230V 50/60Hz F+N 400V 50/60 Hz 3F	230V 50/60Hz F+N 400V 50/60 Hz 3F	230V 50/60Hz F+N 400V 50/60 Hz 3F
Motor	Watt 275+200 HP 0,37+0,27	Watt 275+200 HP 0,37+0,27	Watt 275+200 HP 0,37+0,27
Blade	Ø 300 mm / 12"	Ø 330 mm / 13"	Ø 350 mm / 14"
Cut thickness	mm 23	mm 23	mm 23
Run of carriage	mm 310	mm 310	mm 310
A	465 mm	465 mm	465 mm
B	340 mm	340 mm	340 mm
C	615 mm	645 mm	660 mm
D	660 mm	660 mm	660 mm
E	465 mm	455 mm	455 mm
F	730 mm	730 mm	730 mm
G	650 mm	650 mm	650 mm
L	630 mm	610 mm	600 mm
X	240/270 mm	240/270 mm	240/270 mm
Y	190 mm	210 mm	225 mm
H	240 mm	260 mm	275 mm
W	220 mm	240 mm	250 mm
Blade inclination	35°	35°	35°
Net weight	38 Kg	39 Kg	40 Kg
Shipping	870x840x750 mm	870x840x750 mm	870x840x750 mm
Gross weight	53 Kg	54 Kg	55 Kg