



1 - Controllo elettronico, semplice ed intuitivo
User-friendly, intuitive operation

Macchine sottovuoto

SPACE 30 - 40 - 50 - 70

- Straordinario design riduce l'ingombro della macchina e migliora la praticità
- Campana a grande sviluppo di volume in plexiglass termoformato di grosso spessore sui mod. 50 e 70, ad iniezione sui mod. 30 e 40
- Barra saldante facilmente rimovibile
- Estrema facilità di pulizia grazie alla perfetta planarità del piano di appoggio prodotto.
- Sollevamento coperchio automatico a mezzo di pistoncini pneumatici.

Sistema di controllo elettronico con:

- selezione 6 lingue
- impostazione tempo saldatura, vuoto e gas con scala 1/10 sec.
- visualizzazione percentuale vuoto e tempo residuo
- 8 programmi memorizzabili a piacere
- programma A = vuoto automatico
- programma X = aspirazione esterna a tempo
- programma XA = aspirazione esterna automatica
- Percentuale vuoto automatico regolabile 50-100%
- segnale di avviso sostituzione olio.
- Protezione termica pompa
- Ciclo di preriscaldamento e pulizia olio
- Contacclli totali
- Contatore utilizzo pompa
- Piano per buste con liquidi
- Pompa aspirazione Busch
- Piano posizionamento prodotto in acciaio inox AISI 304 spessore 5 mm.

- Exceptional design to reduce machine size and improve its practicality
- Large and wide bell in thermoformed plexiglass on mod. 50 and 70, injection on mod. 30 and 40
- Easily removable sealing bar
- Extremely easy to clean thanks to a perfectly level product counter.
- Automatic cover lift operated by pneumatic pistons.

Electronic control system featuring:

- 6 selectable languages
- Settable sealing, vacuum and gas time on a scale 1-10 sec.
- Display of vacuum percentage and time to countdown
- 8 different settings savable to preference
- Setting A = automatic vacuum
- Setting A = timed external suction
- Setting XA = automatic external suction
- Adjustable automatic vacuum percentage: 50-100%
- Oil change warning light.
- Thermal pump guard
- Oil preheat and cleaning cycle
- Total rev counter
- Pump meter
- Surface for liquid bags
- Busch suction pump
- 5 mm thick, AISI 304 s/steel, easy to clean plain vacuum chamber.



SPACE 30 BX



SPACE 40 BX+ GAS + SOFT AIR

	Potenza Power Leistung Puissance	Alimentazione Power source Betriebsspannung Alimentation	Pompa del vuoto Vacuum pump Vakuumpumpe Pompe à vide	Barra Bar Schweißstab Barre	Camera Cavity Kammer Chambre	A	B	C	D	E	F	G	H	Peso netto Net weight Netto Gewicht Poids net	Dim. imballo Shipping dimensions Verpackung Emballage	Peso lordo Gross weight Brutto Gewicht Poids brut
	Kw		mc/h	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg	mm	kg
SPACE 30 DX	0,35	230V/50Hz	8	310	340x360x h150	402	525	370	480	334	340	85	160	38	720x570x770	48
SPACE 30 BX	0,35	230V/50Hz	8	310	340x360x h150	402	525	370	480	334	340	85	160	38	720x570x770	48
SPACE 30 DX 12	0,45	230V/50Hz	12	310	340x360x h150	402	525	370	480	334	340	85	160	38	720x570x770	48
SPACE 40 DX	0,75	230V/50Hz	21	410	430x410x h160	493	585	370	542	390	430	85	170	56	760x640x770	66
SPACE 40 BX	0,75	230V/50Hz	21	410	430x410x h160	493	585	370	542	390	430	85	170	56	760x640x770	66
SPACE 50 DX	0,75	230V/50Hz	21	510	545x460x h190	609	640	420	605	430	540	90	210	70	840x870x750	86
SPACE 50 BX	0,75	230V/50Hz	21	510	545x460x h190	609	640	420	605	430	540	90	210	70	840x870x750	86
SPACE 50 DX2	0,75	230V/50Hz	21	410x2	545x460x h190	609	640	420	605	424	428	90	210	75	840x870x750	87
SPACE 50 BX2	0,75	230V/50Hz	21	410x2	545x460x h190	609	640	420	605	424	428	90	210	75	840x870x750	87
SPACE 70 BX3	1,1	400V/50Hz	40	640x1 / 410x2	780x490x h190	877	630	513	747	424	660	95	200	115	-	-
SPACE 70 BX3P	1,1	400V/50Hz	40	640x1 / 410x2	780x490x h190	877	674	1134	1368	424	660	95	200	-	-	-



2 - Barra saldante standard
Standard sealing bar



3 - Doppia barra saldante (50/2)
Double sealing bar (50/2)



4 - Tripla barra saldante (70/3)
Triple sealing bar (70/3)



5 - Sistema sospensione coperchio ammortizzato
Cushion-hinged lid




SPACE 70 BX3




SPACE 70 BX3 P




SPACE 50 BX

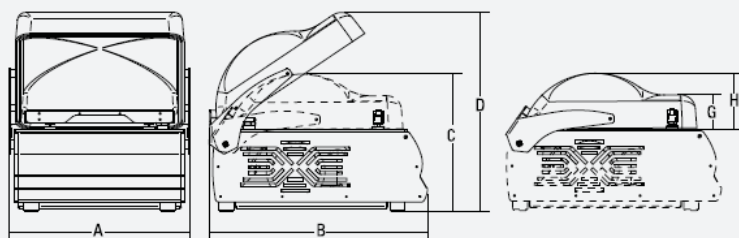

SPACE 30 - 40 - 50



SPACE 50 2



SPACE 70 3

