

FRY TOP S Electric M40 Iron Plate - RIBBED - Thermostated Top Version

Project:
Rev.:
Zone:
Location:



CODICE
CR1652099

MODELLO
D92/10TSFTER

SERIE
DIAMANTE 90



GENERAL CHARACTERISTICS

In addition to offering the maximum choice of solutions and 2 mm thick and 90 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently.
External coatings and feet in stainless steel with Scotch Brite finish.
Working table height adjustable from 840 to 900 mm.
Range modularity: 200-400-600-800-1200
Wide range of accessories.

TECHNICAL SPECIFICATIONS

15 mm thick cooking plate totally independent of the hob .
Large floodable channel around the perimeter of the hotplate for collecting cooking residues, sloping towards the front for draining liquids into the large drawer.
Large grease collection drawer.
Uniform baking temperature over the entire plate.
Optimising heat in the cooking area and increasing the comfort of operators in the kitchen.
Plate not welded to the machine bed with optimisation of structural points under thermal stress
Stainless steel overflow plug, supplied as an accessory, for channel flooding management
Non-welded plate for fast maintenance and replacement in the utility
New version with identical cooking surface area and reduced energy output.
An increase in output per cm² allows a reduction in consumption of up to 15% compared to conventional versions

Floodable gutter for collecting cooking residues around the perimeter of the cooking plate easier cleaning and better retention of moisture in cooking food

Capacious grease collection drawer with capacity for the entire volume of the perimeter channel

Grooved plate design ensures cleanliness right to the end of the plate

Non-welded plate for fast maintenance and replacement in the utility

Plate not welded to the machine bed with optimisation of structural points under thermal stress

Thermal cutting that facilitates the user and adjacent machinery.

Uniform cooking temperature across the entire plate. Optimising heat in the cooking area and increasing operator comfort in the kitchen.

Water dispenser kit available as an accessory

FRY TOP S Electric M40 Iron Plate - RIBBED -
Thermostated Top Version

Project:
Rev.:
Zone:
Location:



CODICE	MODELLO	SERIE
CR1652099	D92/10TSFTER	DIAMANTE 90

Technical Information

SPECIFICATION	DATA
MATERIAL	CR1652099
DEFINITION	D92/10TSFTER FTE RIGATO M40 TOP
COMMERCIAL LINE	DIAMANTE
SUPPLY	ELECTRICS
DIM. WIDTH	400 mm
DIM. PRODUCTIVITY	900 mm
DIM. HEIGHT	250 mm
NET WEIGHT	22,000 Kg
VOLUME (net)	0.09
PACKAGE LENGTH	440 mm
PACKAGE WIDTH	850,000 mm
PACKAGING HEIGHT	550,000 mm
PACKAGE VOLUME	0,209 m3
GROSS PACKING WEIGHT	29,000 Kg
STANDARD POWER SUPPLY	380-415V 3N
FREQUENCY	50-60 Hz
ELECTRICAL POWER	5 kW
IP GRADE	IPX5
CERTIFIED MODEL	D92/10TSFTER

FRY TOP S Electric M40 Iron Plate - RIBBED - Thermostated Top Version

Project:
Rev:
Zone:
Location:




CODICE
CR1652099

MODELLO
D92/10TSFTER

SERIE
DIAMANTE 90

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm- MESURES EN cm
MEDIDAS EN cm - MATEN IN cm - DIMENSIONES EN cm

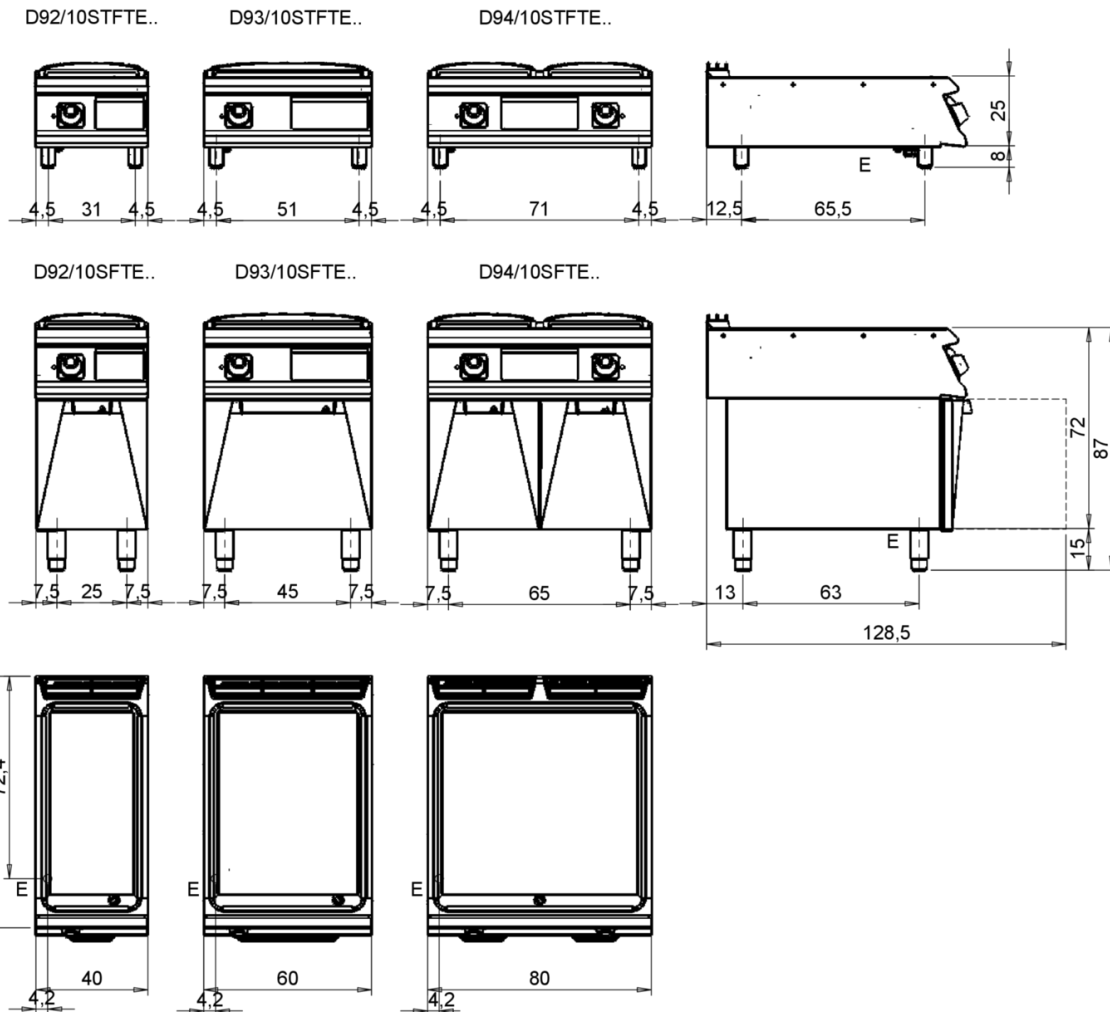

Legenda - Legende - Key - Légende - Leyenda - Leyenda - Leyenda - Leyenda	
E Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse étoupe de câble él - Pisacable - Elektrische kabelwarterl - Entrada cabo eléctrico	G Arrivo gas - Gasanschluss - Gas connection - Arrivée gaz - Union de gas - Gasaansluiting - Ligaç�o g�s
S Attacco scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desaguadero - Wateraftapaansluiting - Jun��o descarga �gua	H20 Arrivo acqua - Wasseranschluss - Water inlet - Arriv�e eau - Union de agua - Wateraansluiting - Jun��o alimenta��o �gua
S1 Scarico vasca - Wannenabflussrohr - Pan outlet - Vidange du bac - Descarga cuba - Water toevoer - Descarga da cuba	A1 = Calda - Heiss - Warm - Chaude - Caliente - Warm - Morno A2 = Fredda - Kalt - Cold - Froid - Fria - Koude - Frio
S2 ^G Valvola di depressione - Anti-depression valve - Unterdruck ventil - Soupape de d�pression - V�lvula de d�presi��n - Onderdrukkelep - V�lvula de depress��o	
S3 Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket water drain Evacuation eau double envelope - Descarga de agua intersticios - Afvoer water tussenuimte - Descarga de �gua na marmitta com Sistema de aquecimento indirecto	
S4 Scarico - Abflussrohr - Drain - Tuyau d'�vacuation - Tubo de drenaje - Aftapbuis - Tubula��o de dreno	L Rubinetto di livello - Level tap - Wasserhahn - Robinet de niveau - Grifo de nivel - Niveaakraan - Torneira de n�vel

FRY TOP S Electric M40 Iron Plate - RIBBED - Thermostated Top Version

Project:
Rev.:
Zone:
Location:



CODICE
CR1652099

MODELLO
D92/10TSFTER

SERIE
DIAMANTE 90

Product's PLUS





Plate not welded to the machine bed with optimisation of structural points under thermal stress




Capacious grease collection drawer with capacity for the entire volume of the perimeter channel



Thermal cutting that facilitates the user and adjacent machinery.




Grooved plate design ensures cleanliness right to the end of the plate




Uniform cooking temperature across the entire plate. Optimising heat in the cooking area and increasing operator comfort in the kitchen.



Non-welded plate for fast maintenance and replacement in the utility



Water dispenser kit available as an accessory



Water dispenser kit available as an accessory

FRY TOP S Electric M40 Iron Plate - RIBBED -
Thermostated Top Version

Project:
Rev.:
Zone:
Location:



CODICE	MODELLO	SERIE
CR1652099	D92/10TSFTER	DIAMANTE 90

ACCESSORIES

CODE	MODELLO	DESCRIZIONE
CR1354989	PRPC	Smooth plate cleaning scraper - chrome-plated
CR1356399	RPR	Striped chrome plate scraper
CR1658619	97CPFT4	M40 fry top cleaning drawer
CR1658609	97TFT	Plancha cleaning cap
CR1354999	PKLR	Replacement blades (10PCS)
CR1658669	9AFT4	Splash guard riser 90cm M40
CR1658699	D794CAFT	WATER LOADING FOR FRY TOP M40 - D70 D90 - GAS OR ELECTRIC
CR1658779	D94EKSCFT	CONTINUOUS DISCHARGE FOR FRY TOP M40 - D90 - ELECTRIC
CR1658809	D94ECSCFT	LOAD + SCAR.CONTINUOUS FOR FRY TOP M40 - D90 - ELECTRIC