





All units are made of AISI 430 stainless steel with AISI 304 top plate. The base legs are durable and height adjustable. The construction solution enables a simple assembly with the option to place the line to the wall or as a free-standing cooking unit. All units 600 line include pressed top plate or basins with round internal angles and ergonomic front panels. All connection points are located on the device rear side.




- The bench top models include the drain in the front part, fitted with a safety device to prevent unwanted water drainage
- The models with a base include the drainage in the base, fitted with stainless vessel and basket
- The fryers are equipped with practical holder of the baskets from stainless AISI 304.
- The fryers are equipped with safety thermostat to 235 °C
- Fully removable electrical box with the unit. It guarantees comfortable handling during the basin cleaning
- If the electrical box is not correctly fixed in the holder, the unit does not heat up. It is achieved by means of micro-switch
- The unit is placed in such way to achieve so called 'cold zone'
- Electrical box disconnecter contains internal silicone sealing. Longer lifetime than disconnecter with plastic cover
- Storage for French fries – capacity GN ½, depth 200mm, ceramic lamp

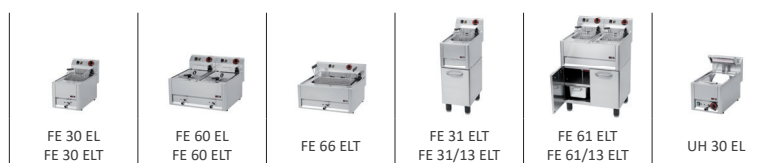


Index	Model	mm	kg	V / Hz	kW	L	Baskets	° C
100 130 300	FE 30 EL	330 x 600 x 290	12,4	230 / 50-60	3	8	210 x 235 x 100	50 - 190
100 130 310	FE 30 ELT	330 x 600 x 290	13,7	400 / 50-60	6	8	210 x 235 x 100	50 - 190
100 130 600	FE 60 EL	660 x 600 x 290	23,1	230 / 50-60	2x 3	8 + 8	2x 210 x 235 x 100	50 - 190
100 130 610	FE 60 ELT	660 x 600 x 290	25,3	400 / 50-60	2x 6	8 + 8	2x 210 x 235 x 100	50 - 190
100 130 620 100 130 621 100 130 623	FE 66 ELT FE 66/2 ELT FE 66/3 ELT	660 x 600 x 290	22	400 / 50-60	9	16	1x 455 x 245 x 80 2x 210 x 235 x 100 3x 130 x 235 x 100	50 - 190
100 130 315	FE 31 ELT	330 x 600 x 900	27,6	400 / 50-60	6	8	210 x 235 x 100	50 - 190
100 130 330	FE 31/13 ELT	330 x 600 x 900	31,7	400 / 50-60	9,9	13	210 x 300 x 120	50 - 190
100 130 615	FE 61 ELT	660 x 600 x 900	46,9	400 / 50-60	12	8 + 8	2x 210 x 235 x 100	50 - 190
100 130 630	FE 61/13 ELT	660 x 600 x 900	54,8	400 / 50-60	19,8	13 + 13	2x 210 x 300 x 120	50 - 190
102 500 310	UH 30 EL	330 x 600 x 570	13	230 / 50-60	0,85	–	–	30 - 90

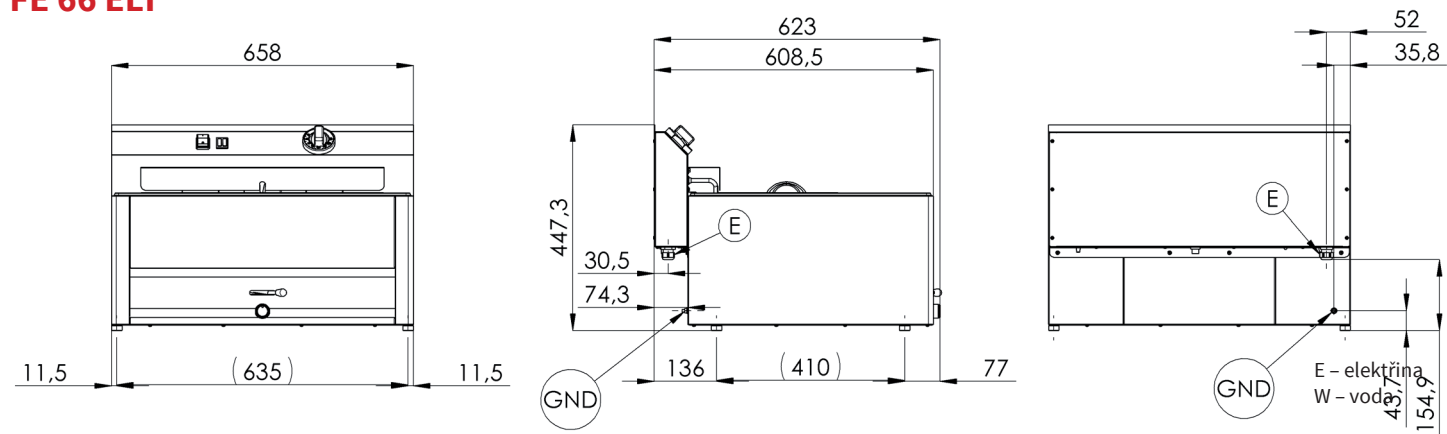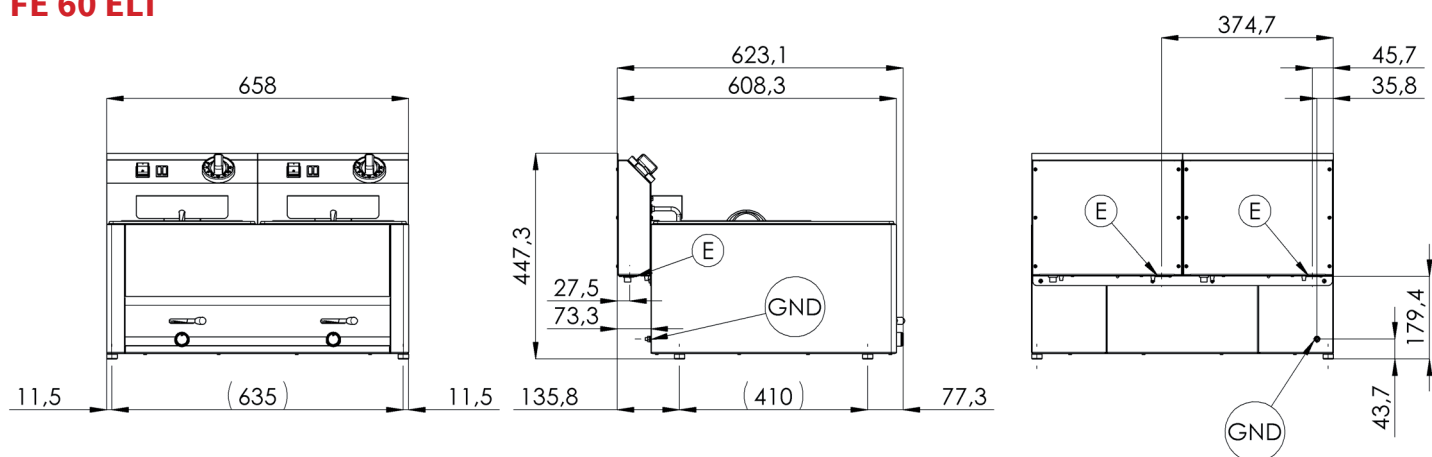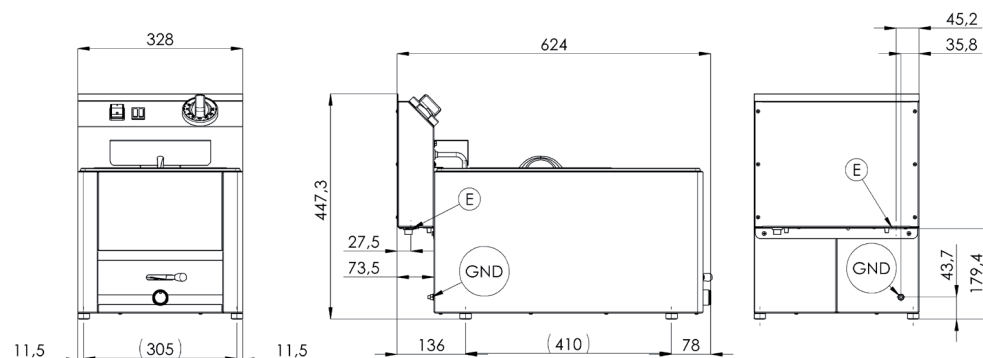


FE 31 ELT

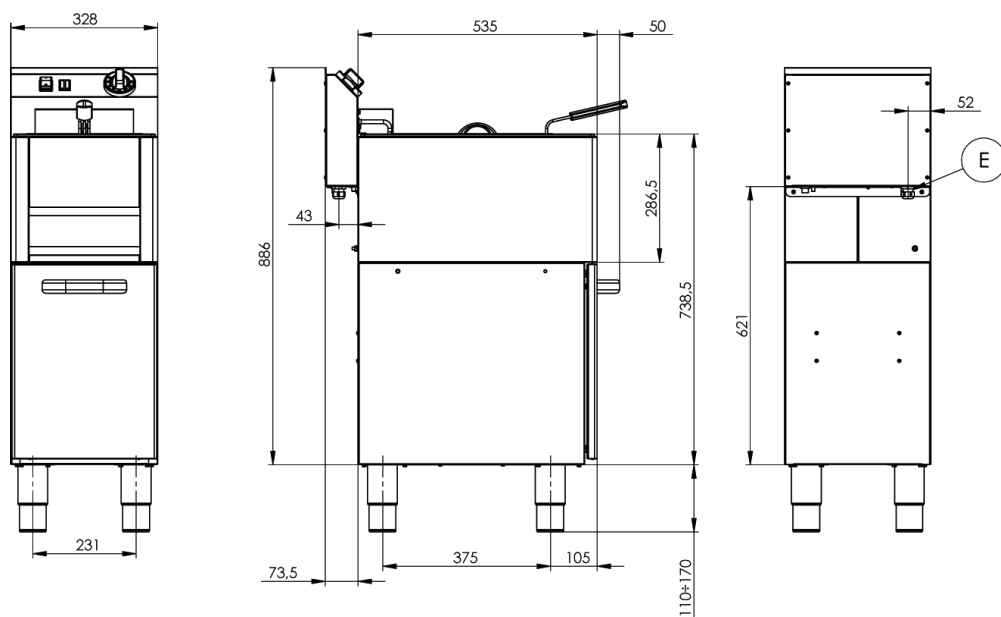

FE 61 ELT

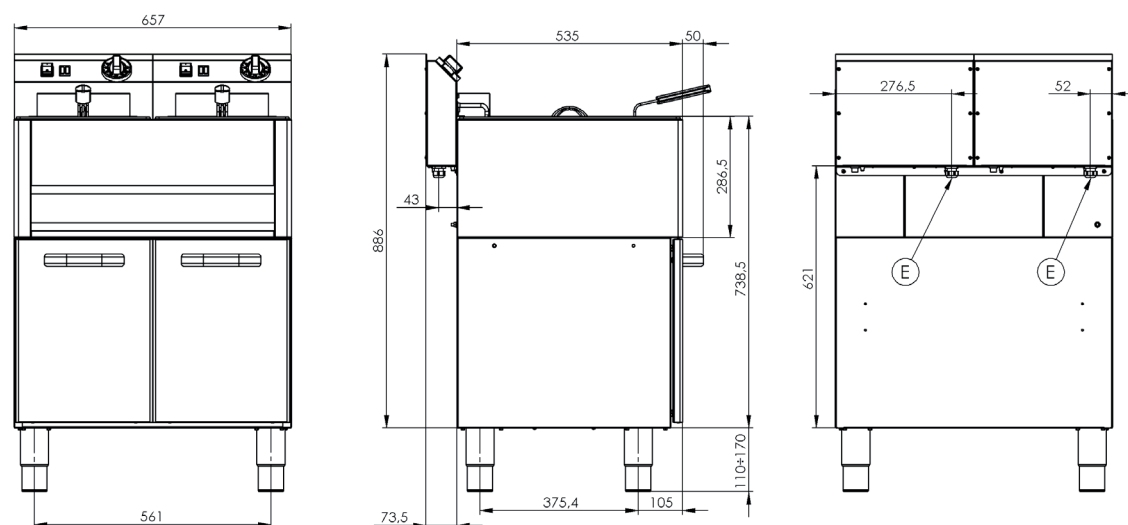

UH 30 EL

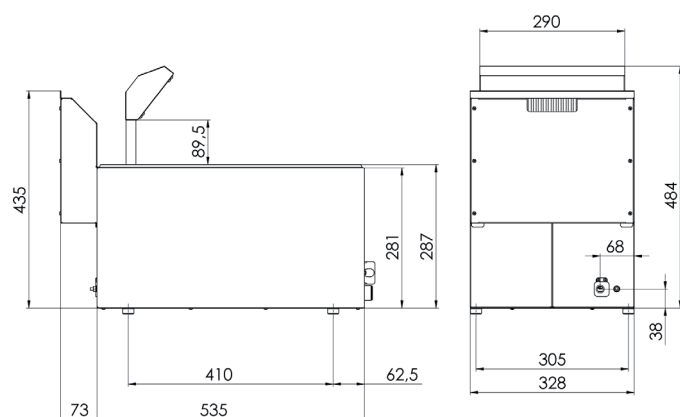

E – electric