



# BOX

## BOX 150 FIZZ

|                            |                                                                |
|----------------------------|----------------------------------------------------------------|
| Cooling capacity (l/h)     | 150                                                            |
| Max continuous supply (l)  | 80                                                             |
| Cold water temperature*    | 5 - 12 °C                                                      |
| Pump                       | Professional rotary carbonation pump                           |
| Cooling technology         | Ice bank - double coil in stainless steel                      |
| Ice bank capacity (l)      | 18                                                             |
| Ice bank (kg)              | 8                                                              |
| Condensation               | Forced ventilation                                             |
| Refrigerant gas            | R290                                                           |
| Adjustable thermostat      | Yes                                                            |
| Supply                     | 230 V - 50 Hz                                                  |
| Compressor power           | 1/3 HP                                                         |
| Absorbed power             | 875 W - 3,8 A                                                  |
| Working room temperature   | Min 5°C - Max 35°C                                             |
| Inlet water pipe           | Ø3/8" (9,52 mm)                                                |
| Inlet CO <sub>2</sub> pipe | Ø5/16" (8 mm)                                                  |
| Typology                   | Undercounter                                                   |
| Net weight (kg)            | 33                                                             |
| Gross weight (kg)          | 45                                                             |
| Dimensions W x D x H (mm)  | 475 x 458 x 520                                                |
| Packaging dimensions (mm)  | 550 x 700 x 750                                                |
| Dispensing options         | Cold still water, cold sparkling water, room temperature water |
| Materials                  | Robust stainless steel                                         |

### ALTRE CARATTERISTICHE


Water pressure reducer

### OPTIONAL

|                      |                               |
|----------------------|-------------------------------|
| Filters              | Activated carbon filter + UVC |
| Filtration           | UF or reverse osmosis         |
| Anti-flooding device | Water block                   |
| Taps                 | Mechanical or electronic      |

\* rated at a room temp. of 25 °C and inlet water temp. of 20 °C

For a proper installation of the system, the use of the WATER BLOCK is compulsory.

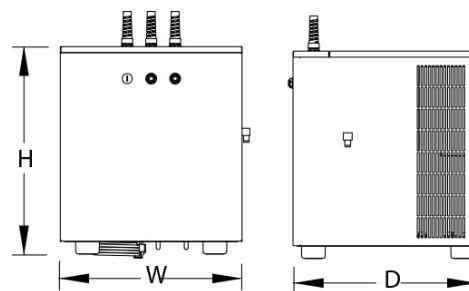

### CERTIFICATIONS

